




CHM 150 - PERFORMANCE MIT 4-POLIGE MOTOREN BEZOGEN AUF N1= 1400 MIN-1

TYPE	i=ratio	n2 r/min	Kw=P1	Nm=T2	f.s.	Mögliche Motoranschlußflansche	
CHM 150	7.5	186.7	15	680	1.6	160	B5
	10	140.0	15	905	1.2	160	B5
	15	93.3	15	1310	0.9	160	B5
	20	70.0	11	1270	1.0	160	B5
	25	56.0	11	1520	0.8	160	B5
	30	46.7	7.50	1240	0.8	132	B5
	40	35.0	7.50	1560	0.9	132	B5
	50	28.0	5.50	1405	0.9	132	B5
	60	23.3	5.50	1610	0.8	132	B5
	80	17.5	4	1430	0.8	112/100	B5
	100	14.0	3	1300	0.8	112/100	B5

ABMESSUNGEN

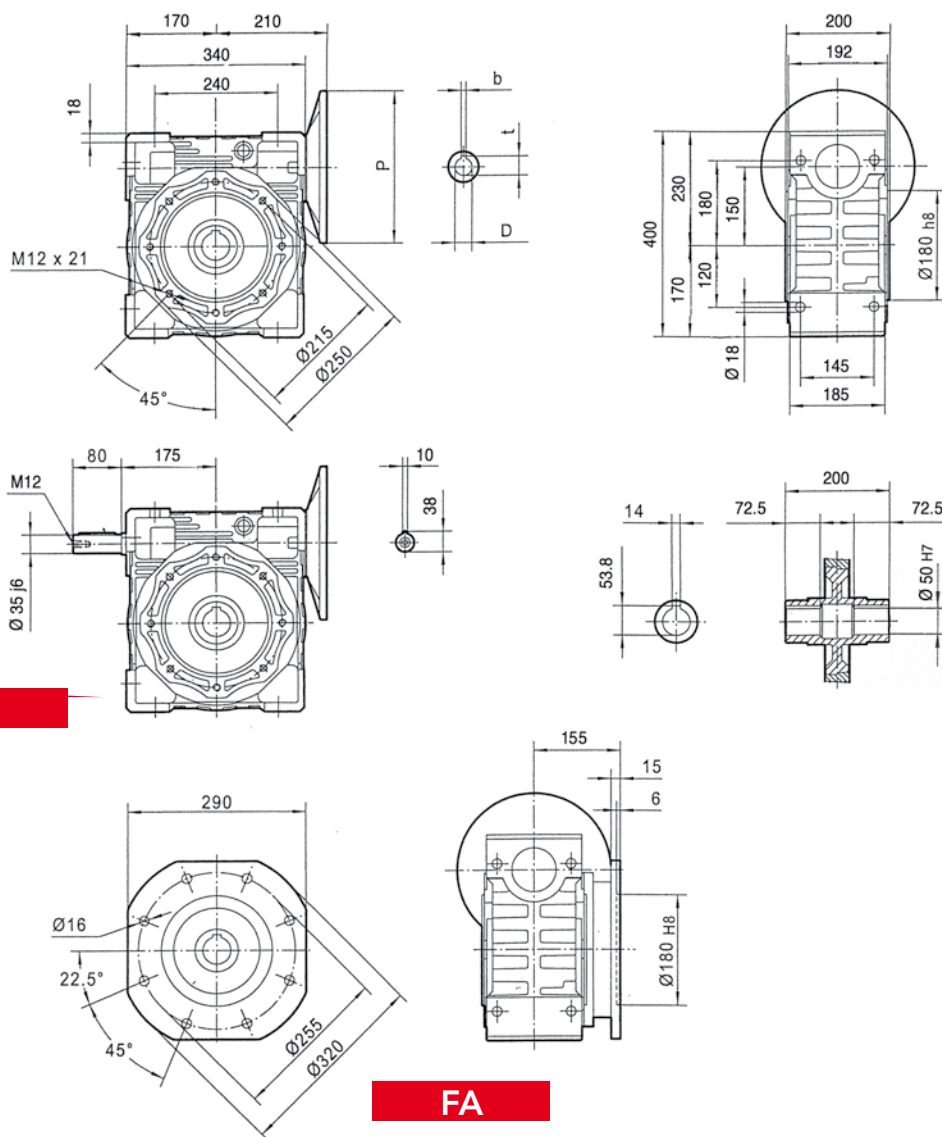

Gewicht 84 Kg , ohne Motor

PAM IEC	P	DE8	b	t
160B5	350	42	12	45.3
132B5	300	38	10	41.3
112B5	250	28	8	31.3
100B5	250	28	8	31.3